


## MONUMENTING STREET INTERSECTIONS WHERE CURBS AND GUTTERS ARE INSTALLED

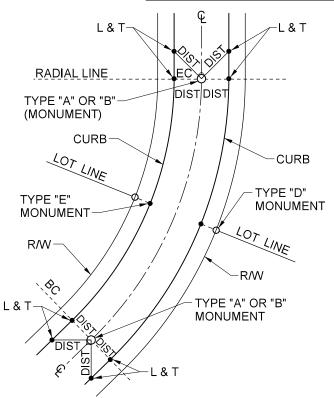

## MONUMENTING BEGINNING AND ENDING OF CURVE

## NOTES:

- L & T SHOWN HEREON INDICATES A LEAD AND TACK OR STEEL PIN MONUMENT SET IN CONCRETE CURB.
- 2. A METAL IDENTIFICATION DISK SET WITH A LEAD AND TAG OR STEEL PIN MONUMENT WITNESS TO PROPERTY CORNER MAY BE SET ("E" MONUMENT), IN LIEU OF SETTING FRONT LOT CORNERS ("D" MONUMENT).
- 3. THE PI OF THE CURVE CENTERLINE OF A STREET MAY BE MONUMENTED IN LIEU OF EC & BC, IF THE PI FALLS WITHIN THE TRAVELED WAY. IT SHALL BE REFERENCED WITH L & T's IN CURB.
- 4. SEE MONUMENT SPECIFICATIONS SECTION 21 OF THIS ORDINANCE FOR TYPE "A", "D", & "E" MONUMENT DESCRIPTION AND STANDARD №. 903 FOR TYPE "B" MONUMENT DRAWING. SEE SPECIFICATIONS SECTION 21.07 OF THIS ORDINANCE FOR MONUMENT SCHEDULE.
- 5. TYING OUT BC'S AND EC'S WITH 90 DEGREE TIES INTO THE TANGENT.

NOT TO SCALE PREPARED UNDER THE SUPERVISION OF: PROFESSIONAL COUNTY OF RIVERSIDE REGISTER ALAN LANC ENGINEER lack 11/30/22 STREET CENTERLINE DIRECTOR OF TRANSPORTATION DATE C48048 **MONUMENT** MARK LANCASTER, P.E. REVISION DESCRIPTION MARK DATE APPROVED OF CALFORN STANDARD No. 901