


NOTES:

- (A) SIGN PLATES (5052-H38 ALUMINUM ALLOY MATERIAL)
- (B) 2" SQ x 12" CAST ANODIZED ALUMINUM POST CAP WITH SIX 3/8" ALLEN HEAD STAINLESS STEEL SET SCREWS TO FIT 0.125" SIGN BLANK
- (C) CENTER CROSS SADDLE SHALL BE 12" ONE-PIECE CAST ANODIZED ALUMINUM WITH FOUR 3/8" STAINLESS STEEL ALLEN HEAD SET SCREWS TO FIT 0.125" SIGN BLANK



NOT TO SCALE

FOR ABBREVIATIONS SEE SHEET 2

PREPARED UNDER THE SUPERVISION OF:

DIRECTOR OF TRANSPORTATION

MARK LANCASTER, P.E.

REVISION DESCRIPTION	MARK	DATE	APPROVED	\'
				\




11/30/22

DATE

COUNTY OF RIVERSIDE

STREET NAME SIGN (CURB TO CURB WIDTH LESS THAN OR EQUAL TO 60')

STANDARD No. 1221 (1 OF 2)

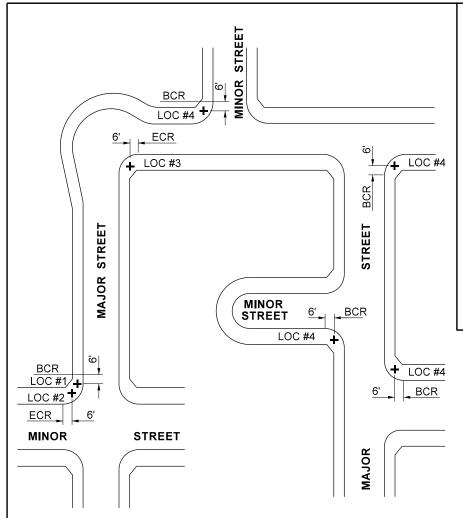

SIGN INSTALLATION LOCATIONS

SIGN LOC No. 1 - FOR RESIDENTIAL STREETS WITHIN A TRACT SIGN LOC No. 2 - ALL OTHER STREETS THAT ARE NON-RESIDENTIAL STREETS WITHIN A TRACT FOR LOCATION THAT IS INSIDE KNUCKLES

FOR T-INTERSECTION

*FINAL SIGN LOCATION TO BE DETERMINED BY COUNTY ENGINEER

NOTE:

ONE COMPLETE NAME SIGN UNIT IS REQUIRED AT EACH INTERSECTION WHEN PAVED WIDTHS OR CURBED WIDTHS OF ALL INTERSECTING STREETS ARE 60 FEET OR LESS, AT INTERSECTIONS WITH ONE OR MORE STREETS WITH AN ULTIMATE PAVED WIDTH OR CURBED WIDTH GREATER THAN 60 FEET, USE STANDARD NO. 1220.

NOT TO SCALE

coll

MARK LANCASTER, P.E.


REVISION DESCRIPTION

PROFESS.

ALAN LANCASTER

18 PREPARED UNDER THE SUPERVISION OF: REGISTER 11/30/22 DIRECTOR OF TRANSPORTATION DATE MARK DATE APPROVED OF CALIFORN

SIGN INSTALLATION DETAILS



SIGNS SHALL NOT EXCEED 48". IF STREET NAME CONTAINS A SECOND WORD, SECOND WORD MAY BE ABBREVIATED AS FOLLOWS:

SUFFIX	ABBR		
AVENUE	Ave		
BOULEVARD	Blvd		
CANYON	Cyn		
CENTER	Ctr		
CIRCLE	Cir		
COURT	Ct		
DRIVE	Dr		
LANE	Ln		
LOOP	Lp		
PARKWAY	Pkwy		
PLACE	PI		
RANCH	Rch		
ROAD	Rd		
SCHOOL	Sch		
SPRING	Spr		
STREET	St		
TERRACE	Ter		
TRAIL	Tr		
WAY	Way		

COUNTY OF RIVERSIDE

STREET NAME SIGN (CURB TO CURB WIDTH LESS THAN OR EQUAL TO 60')

STANDARD No. 1221 (2 OF 2)